

Service the industry with high-performance
cost-effective solutions

PRODUCT DETAILS

Conductor: Plain Copper Wire & Tinned Copper Wire


Insulation : PVC V75 Flame Retardant

Colours:

2 Core: White, Red

3 Core: White, Red, Blue

4 Core: White, Red, Blue, Black or other Colour Combinations

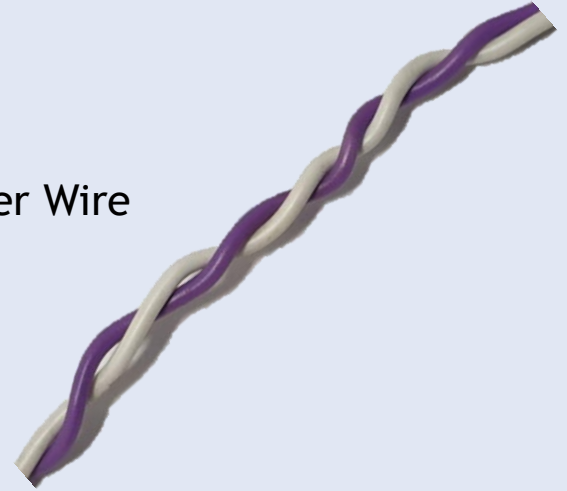

Part No.	Conductor No./mm	AWG Size	No. Cores	Insulation Thickness (mm)	Approx. Dia. (mm)
144/0008*	1/0.50	24	2	0.2	1.8
144/0009	1/0.50	24	3	0.2	1.9
144/0010	1/0.50	24	4	0.2	2.2
144/0011	1/0.71	21	2	0.3	2.2
144/0012	24/0.20	18	Fig. 8	0.5	2.3 x 4.7

Part No.	Conductor No./mm	AWG Size	No. Cores	Insulation	Core	Nominal
144/0013*	1/0.50	24	2	Polyethylene	Violet/Brown	120 Ohms

APPLICATION:

- for wiring of detonators and shotfiring equipment.
- for wiring of electronic equipment.
- jumper wires to Telecom specification.