


Cat 6A shielded Mini cable assemblies

Model number: 138/0XXX (XXX denotes length in meters)

Telstra S/I 40011417 5m

FEATURES

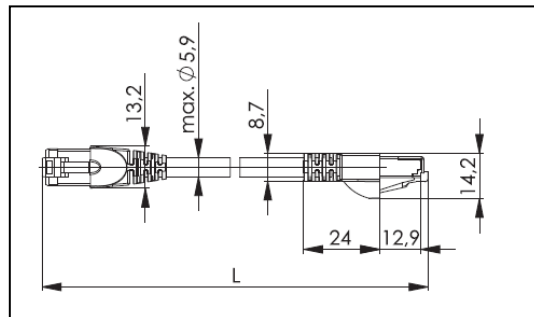

Easy Installation Connectivity

- Complies with IEA Cat 6A performance limits
- Small diameter mini cables
- Length available as required by customer, most common lengths held in stock.
- Designed to meet Australian conditions
- FRHF sheath

APPLICATIONS

The Diamond Optics Cat 6A shielded cable assembly meets or exceeds IEA Cat 6A performance limits and allows the minimization of space of patching infrastructure. Correct length cords available ex stock will enable a clean installation without excess cord being stored in unwanted locations. This will enable future upgradability and redirection of services to be efficiently carried out.

Other Related Products

- Cat 6a shielded outlets
- Cat 6A panels 24 way in 1 RU.
- 1 and 2 RU horizontal management bars.

CABLE LENGTHS

Length	Colour
0,25 m	grey
0,5 m	grey
1,0 m	grey
1,5 m	grey
2,0 m	grey
3,0 m	grey
5,0 m	grey
7,5 m	grey
10,0 m	grey
15,0 m	grey
20,0 m	grey
25,0 m	grey
50,0 m	grey